


# GHI-891

## 8U Rackmount Chassis

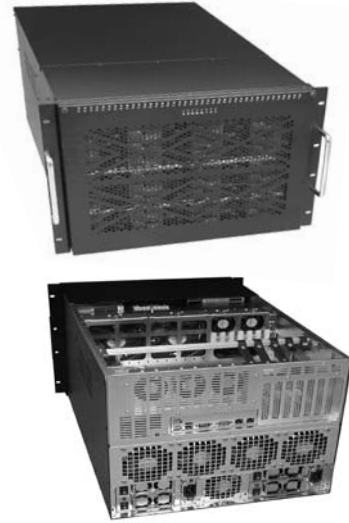

### Specifications

- **EIA RS-310C 19" Rackmount Standard**
- **Construction:** Heavy Duty Cold Rolled Electroplated Steel
- **Color:** Black (Standard), Beige or Custom
- **System Boards:** Pentium 4, Dual Xeon, Athlon 64, Dual Opteron
- **Support EATX M/B (Max. to 13" x 16") SSI EEB 3.0**
- **Drive Capacity:** (GHI-891-1): 1x Slim CD-ROM & 1x Slim FDD & 40x 3.5" Swappable Trays
- **Drive Capacity:** (GHI-891-2): 1x Slim CD-ROM & 1x Slim FDD & 40x 3.5" Swappable Trays & 1x5.25"CD-ROM & 2x 3.5"HDD
- **Drive Capacity:** (GHI-891-3): 1x Slim CD-ROM & 1x Slim FDD & 44x 3.5" Swappable Trays
- **Drive Interface:** SATA, SCSI320 , Multilane SATA or SAS
- **Power Supply(Optional):** 2U Single up to 700W or 2U Redundant up to 600W or N+1 up to 950W or 1U Redundant up to 1650W ATX P/S (Rear Installation) Max. Depth 300mm
- **Cooling:** (GHI-891-1): 5x(60mm = 23.5CFM ea.) & 1x (80mm = 42.5CFM ea.) & 4x (90mm = 51.0CFM ea.) & 5x (120mm = 90.0CFM ea.) Fan
- **Cooling:** (GHI-891-2): 5x(60mm = 23.5CFM ea.) & 2x (90mm = 51.0CFM ea.) & 5x (120mm = 90.0CFM ea.) Fan
- **Cooling:** (GHI-891-3): 8x (40mm = 7.0CFM ea.) & 5x(60mm = 23.5CFM ea.) & 1x (80mm = 42.5CFM ea.) & 5x (120mm = 90.0CFM ea.) Fan
- **Front Door:** Single Door With 2 Thumbscrews (Removable)
- **Connector Port (Front):** 2x USB Ports
- **Thermal Management Card:** GHA-CO04
- **Indicators:** LEDs for Power ON/OFF , HDD Activity, Fan, Temperature, LAN
- **Flexible Hold Down Bar Designed**
- **Switch:** Power ON/OFF Momentary (Pushbutton), System Reset, Buzzer Reset
- **Dimensions (W x H x D):** 483 x 354 x 666mm (19" x 13.9" x 26.2")
- **Cuft:** 9.1
- **GW:** 40.9 kgs / 90.2 lbs
- **Carton Size(cm):** 85 x 49.4 x 61.5 (33.5" x 19.5" x 26.2")
- **Humidity:** 5% - 95% Non-condensing

### Dimension

